





EO-FLW-180W

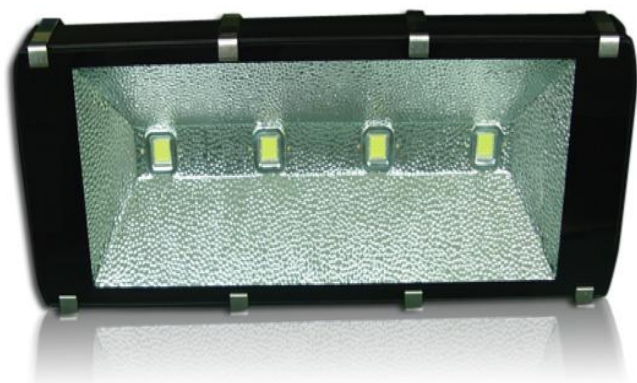

180watt LED Flood Light

SPECIFICATIONS	
Model Number	EO_FLW180
Power Consumption	180 watts
LED Consumption	3pcs x 60 watts
LED Initial Flux	>16200 lumens
Average Lumens	4m – 428 lux 6m – 248 lux 8m – 168 lux 10m – 114 lux 12m – 62 lux
LED Luminous Efficiency	85 -100 lumens / watts
Illuminated Area	4m – 7*6 m 6m – 11*9 m 8m – 14*12 m 10m – 18*15 m 12m – 21*18 m
Light Angle	120°
Power Factor	0.98
Power Efficiency	>90%
Working Voltage	DC 32-36 voltage
Input Voltage	240 Volts, 50 Hz
Lamps Efficiency	>85%
Storage Temperature	-25°C to + 85°C
Light Body & Lampshade Material	Aluminium House & PC/Glass
Working Temperature	- 40°C to + 55°C
IP Rating	IP 65
Colour Temperature	Warm white 3500 kelvin Cool White 6000 kelvin
Colour Index	>Ra80
Certificate	CS 9567N IEC 60598.2.1B IEC 61346.2.13:2006  N28689
Life Expectancy	50,000 + Hrs
Warranty	3 Years

This product is eligible for the NSW Energy Savings Scheme

For more information visit our website: www.eolighting.com.au

© Summit LED Energy Australia Pty Ltd t/as eo lighting

Ph: 02 9653 9909 Fax: 02 9653 9959

Head Office Sydney: Unit 5G 256 New Line Road, Dural, NSW, 2158